



Unit 7 Swan Business Centre, Buckingham, MK18 1TB
01280 817304
01280 817185
sales@bellflowsystems.co.uk



BAG-800 · SBAG-800



TECHNICAL CARD




G90a

150
l/min

230/240
VAC




BAG-800

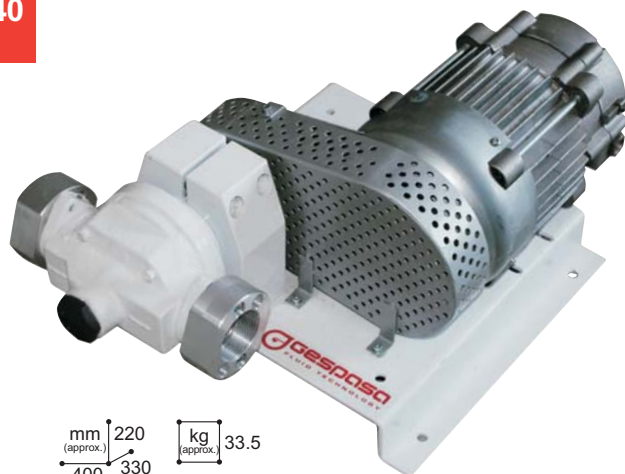

Hose and nozzle not included


SBAG-800

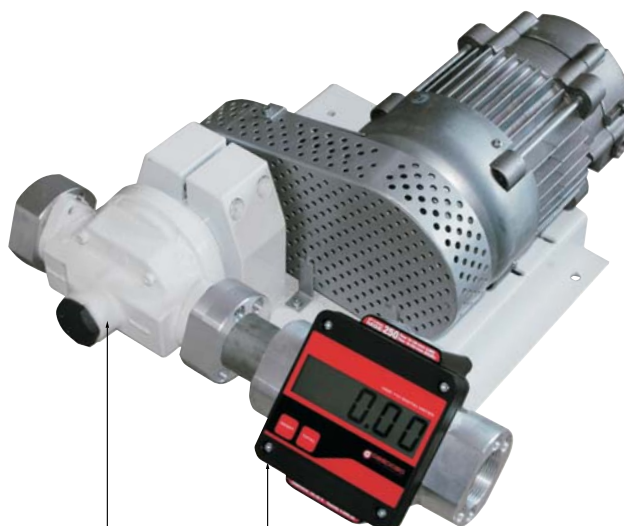

BAG-800 Pump

MGE-250* Electronic meter
(new model)

> Flow curves

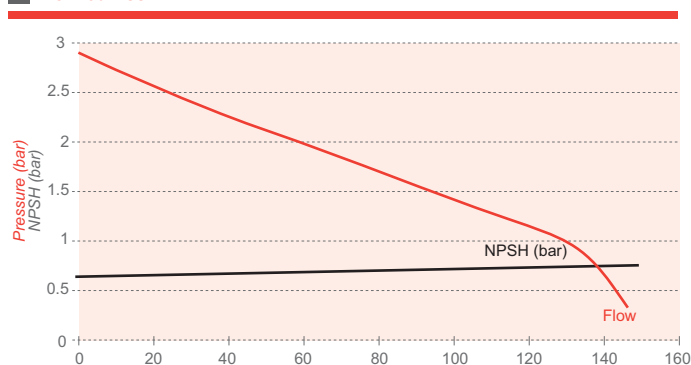

BAG-800 230/400 VAC · triphase motor
BAG-800 230 VAC · single-phase motor

27520
27580

• Self-suction pump on baseplate with EExd (ATEX) motor and wheel system for the diesel, petrol, and kerosene transfer.

TECHNICAL DATA

- Self-suction - self-priming. Eccentric of self-adjusting blades
- With recirculation bypass
- Free flow: 100-150 l/min
- Consumption: 4.5-6 A (230 VAC) 1.8-2.7 A (400 VAC)
- Motor: 1 kW 230/400 VAC 50Hz 3ph
0.90 kW 230 VAC 50 Hz single-phase
- Explosion-proof (ATEX)
- With thermal protector
- S1 continuous duty
- 1,400 rpm
- Motor zone classification: II 2G EExd IIB T3
- Motor certificate: TÜV 04 ATEX 2488 X
- Operation temperature: 0 °C - +50 °C
- Inlet/outlet connection: 1 1/2" BSP
- Bypass pressure: 3-3.5 bar

SBAG-800 · BAG-800 (3ph) + MGE-250
SBAG-800 · BAG-800 (single-phase) + MGE-250

27530
27600

- Supply kit **composed of**: self-suction bedplate pump with EExd (ATEX) motor and wheel system with MGE-250 electronic meter. Its explosionproof motor makes it suitable for the **diesel** transfer (*please, consult other liquids*).
- High quality aluminium meter
- It works through oval gears of high accuracy: $\pm 0.5\%$
- When the meter does not work, the meter stores all the information avoiding any information loss.

■ Spare-part

BAG-800 pump body

275004000