



Available from: Bell Flow Systems Ltd
 7 Swan Business Park, Buckingham, MK18 1TB
 ☎ 01280 817304 sales@bellflowsystems.co.uk
 📠 01280 817185

MG-80A

Volumetric Mechanical Aluminium Meter



code 32300


G1a



mm (approx.) 165
 180 132

Kg (approx.) 1,95

Calibration screw cap

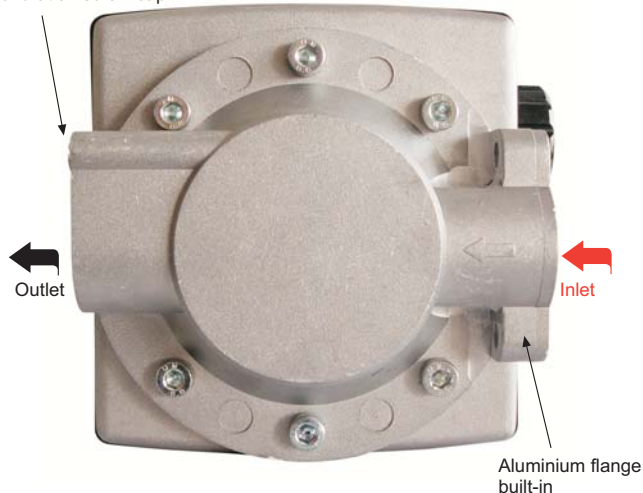

USE

- The **MG-80A is made for private use**. The meter security, regarding to material quality and reliability, is determined by the EC directive regulations and it is endorsed by the quality controls of leading companies in the sector; it also guarantees the toxicity absence and the negative ecological effects.
- This meter is **made of aluminium** and high quality plastics. Its measuring chamber is fireproof and it allows to transfer any type of hydrocarbon liquid. *(Please, consult other type of liquids).*
- It has built-in a bypass screw for the meter calibration.

TECHNICAL DATA



- Measuring chamber: fireproof of swinging disc
- Flow: **10-90 l/min**
- Accuracy: **±1%**
- Partial indicator of 3 digits and totalizer of 6 digits
- Maximum operation pressure: 5bar
- Resistance pressure: 15bar
- Max. temperature: 60°C
- Min. temperature: -10°C
- Inlet and outlet connections 1" GAS
- Inlet connection through thread or flange
- Aluminium body

Optional accessories:


- Filter FUP-1 FF1" GAS (BSP) of 352 microns
- M1" long plastic union flange Kit

66030
 800003027

8 POSITIONS

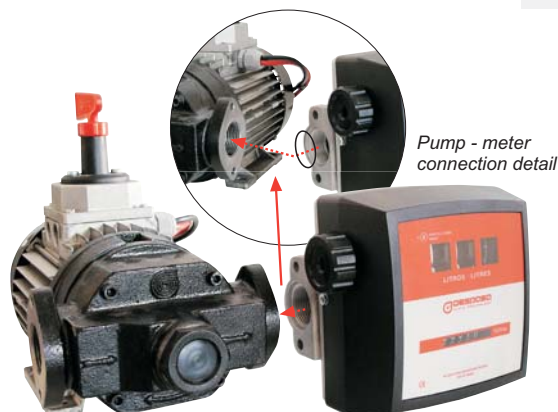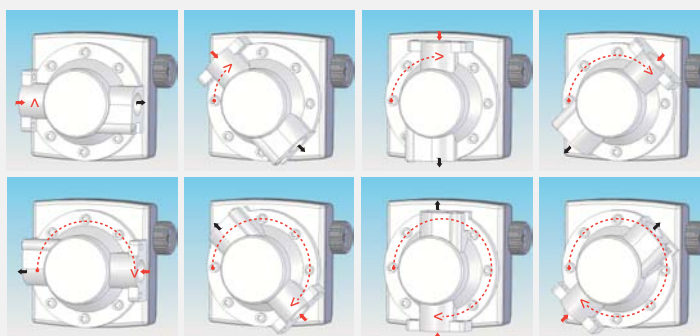

Pump - meter
 connection detail

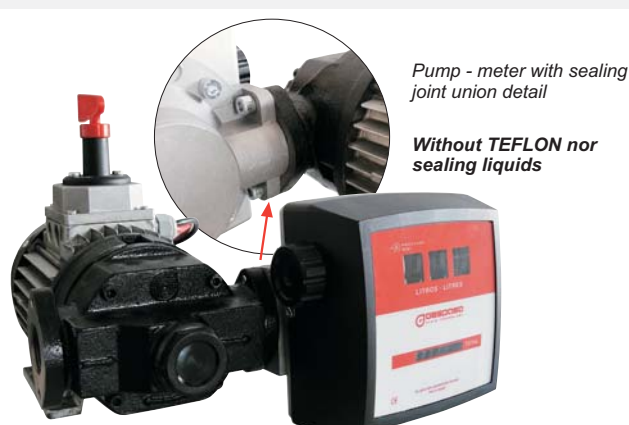

Pump - meter with sealing
 joint union detail

Without TEFLON nor
 sealing liquids